

(12) **INTERNATIONAL APPLICATION PUBLISHED UNDER
THE PATENT COOPERATION TREATY (PCT)**

(19) World Intellectual Property Organization
International Bureau

[WIPO]

[Bar Code]

(43) International Publication Date
September 29, 2005 (09/29/2005)


PCT

(10) International Publication Number
WO 2005/089899 A1

- (51) International Patent Classification⁷: **B01D 35/30** (71) Applicant (*for all designated states except the U.S.*): **HYDAC FILTERTECHNIK GMBH** [DE/DE]; Industriegebiet, 66280 Sulzbach/Saar (DE).
- (21) International Application No.: PCT/EP2004/010868
- (22) International Filing Date: September 29, 2004 (09/29/2004) (72) Inventor; and (75) Inventor/Applicant (*U.S. only*): **KLEIN, Volkmar** [DE/DE]; Marxstrasse 24, 66482 Zweibrücken (DE). **SANN, Nobert** [DE/DE]; Hauerstrasse 38b, 66292 Riegelsberg (DE).
- (25) Language in which the international application was originally filed: German (74) Representative: **BARTELS AND PARTNER, PATENT ATTORNEYS**; Lange Strasse 51, 70174 Stuttgart (DE).
- (26) Language in which the international application is published: German
- (30) Priority Data:
10 2004 008 879.9
February 18, 2004 (02/18/2004) DE

[continued on next page]

(54) Title: **FILTER DEVICE**

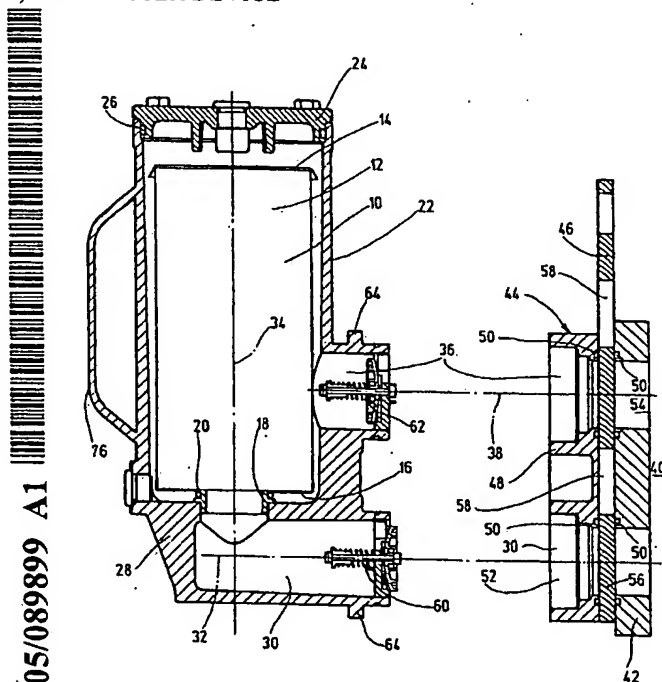

(57) Abstract: The invention relates to a filter device, comprising at least one filter element (10), which may be housed in a filter housing (22), connected for the flow of fluid by fluid connections (30, 36) to a fluid device, in particular, in the form of a hydraulic tank (40), using a connector device (44). According to the invention, a type of plunger valve arrangement is achieved, whereby the connector device (44) is provided with at least one longitudinally-displaceable blocking piece (46), which, in the blocking position, blocks the provided fluid connection (30, 36) and, after displacement into an open position releases the same, which permits a blocking or releasing of said fluid connections in an rapid operation process, in order to carry out a filter element exchange for the used filter medium.

(57) Zusammenfassung: Die Erfindung betrifft eine Filtervorrichtung mit mindestens einem Filterelement (10), das in einem Filtergehäuse (22) aufnehmbar ist, das über Fluidanschlüsse (30, 36) mit einer Fluideinrichtung, insbesondere in Form eines Hydrauliktanks (40), mittels einer Anschlusseinrichtung (44) fluidführend verbindbar ist. Dadurch, dass die Anschlusseinrichtung (44) mit mindestens einem längsverschiebbaren Sperrteil

mittels einer Anschlusseinrichtung (44) fluidführend verbindbar ist. Dadurch, dass die Anschlusseinrichtung (44) mit mindestens einem längsverschiebbaren Sperrteil

[Fortsetzung auf der nächsten Seite]

WO 2005/089899 A1

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL,

SZ, TY, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European Patent (AT, BE, GB, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *With International Search Report.*

Reference is made for an explanation of the two-letter codes and the other abbreviations to the Guidance Notes on Codes and Abbreviations in the front section of each regular PCT Gazette edition.